



HAOPIN MICROELECTRONICS CO.,LTD.

Description

Passivated high commutation triacs in a plastic envelope intended for use in circuits where high static and dynamic dV/dt and high dI/dt can occur. These devices will commutate the full rated ms current at the maximum rated junction temperature without the aid of a snubber.

<p>Symbol</p> 		<p>Simplified outline</p> 	
Pin	Description		
1	Main terminal 1 (T1)		
2	Main terminal 2 (T2)		
3	gate (G)		
TAB	Main terminal 2 (T2)		

Applications:

- ◆ Motor control
- ◆ Industrial and domestic lighting
- ◆ Heating
- ◆ Static switching

Features

- ◆ Blocking voltage to 600 V
- ◆ On-state RMS current to 16 A

SYMBOL	PARAMETER	Value	Unit
V_{DRM}	Repetitive peak off-state voltages	600	V
$I_T (RMS)$	RMS on-state current	16	A
I_{TSM}	Non-repetitive peak on-state current	140	A

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
R_{thj-mb}	Thermal resistance Junction to mounting base	full cycle	-	-	1.2	K/W
		half cycle	-	-	1.7	
R_{thj-a}	Thermal resistance Junction to ambient	in free air	-	60	-	K/W

HAOPIN MICROELECTRONICS CO.,LTD.

Limiting values in accordance with the Maximum system(IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN	Value	UNIT	
V_{DRM}	Repetitive peak off-state voltages		-	600	V	
$I_{T(RMS)}$	RMS on-state current	Full sine wave; $T_{mb} \leq 99^{\circ}C$	-	16	A	
I_{TSM}	Non repetitive surge peak on-state current	Full sine wave; $T_j = 25^{\circ}C$ prior to surge	$t = 20ms$	-	140	A
			$t = 16.7ms$	-	150	A
I^2t	I^2t for fusing	$T_p = 10ms$	-	98	A ² S	
di_T/dt	Repetitive rate of rise of on-state current after triggering	$I_{TM} = 20A; I_G = 0.2A;$ $di_G/dt = 0.2A/\mu s$	-	100	A/ μs	
I_{GM}	Peak gate current		-	2	A	
V_{GM}	Peak gate voltage		-	5	V	
P_{GM}	Peak gate power		-	5	W	
$P_{G(AV)}$	Average gate power	Over any 20 ms period	-	0.5	W	
T_{stg}	Storage temperature range		-40	150	$^{\circ}C$	
T_j	Operating junction Temperature range		-40	125	$^{\circ}C$	


$T_j = 25^{\circ}C$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT	
Static characteristics							
I_{GT}	Gate trigger current ²	$V_D = 12V; I_T = 0.1A$	T2+G+	2	18	50	mA
			T2+G-	2	21	50	mA
			T2-G-	2	34	50	mA
I_L	Latching current	$V_D = 12V; I_{GT} = 0.1A$	T2+G+	-	31	60	mA
			T2+G-	-	34	90	mA
			T2-G-	-	30	60	mA
I_H	Holding current	$V_D = 12V; I_{GT} = 0.1A$	-	31	60	mA	
V_T	On-state voltage	$I_T = 20A$	-	1.2	1.5	V	
V_{GT}	Gate trigger voltage	$V_D = 12V; I_T = 0.1A$ $V_D = 400V; I_T = 0.1A; T_j = 125^{\circ}C$	- 0.25	0.7 0.4	1.5 -	V	
I_D	Off-state leakage current	$V_D = V_{DRM(max)}; T_j = 125^{\circ}C$	-	0.1	0.5	mA	

Dynamic Characteristics

dV_D/dt	Critical rate of rise of off-state voltage	$V_{DM} = 67\% V_{DRM(max)}; T_j = 25^{\circ}C$ exponential waveform; gate open circuit	1000	4000	-	V/ μs
di_{com}/dt	Critical rate of change of commutating current	$V_{DM} = 400V; T_j = 25^{\circ}C$ $I_{T(RMS)} = 16A$ without snubber; gate open circuit	-	28	-	A/ms
t_{gt}	Gate controlled turn-on time	$I_{TM} = 20A$ $V_D = V_{DRM(max)}; I_G = 0.1A$ $di_G/dt = 5A/\mu s$	-	2	-	μs

Description

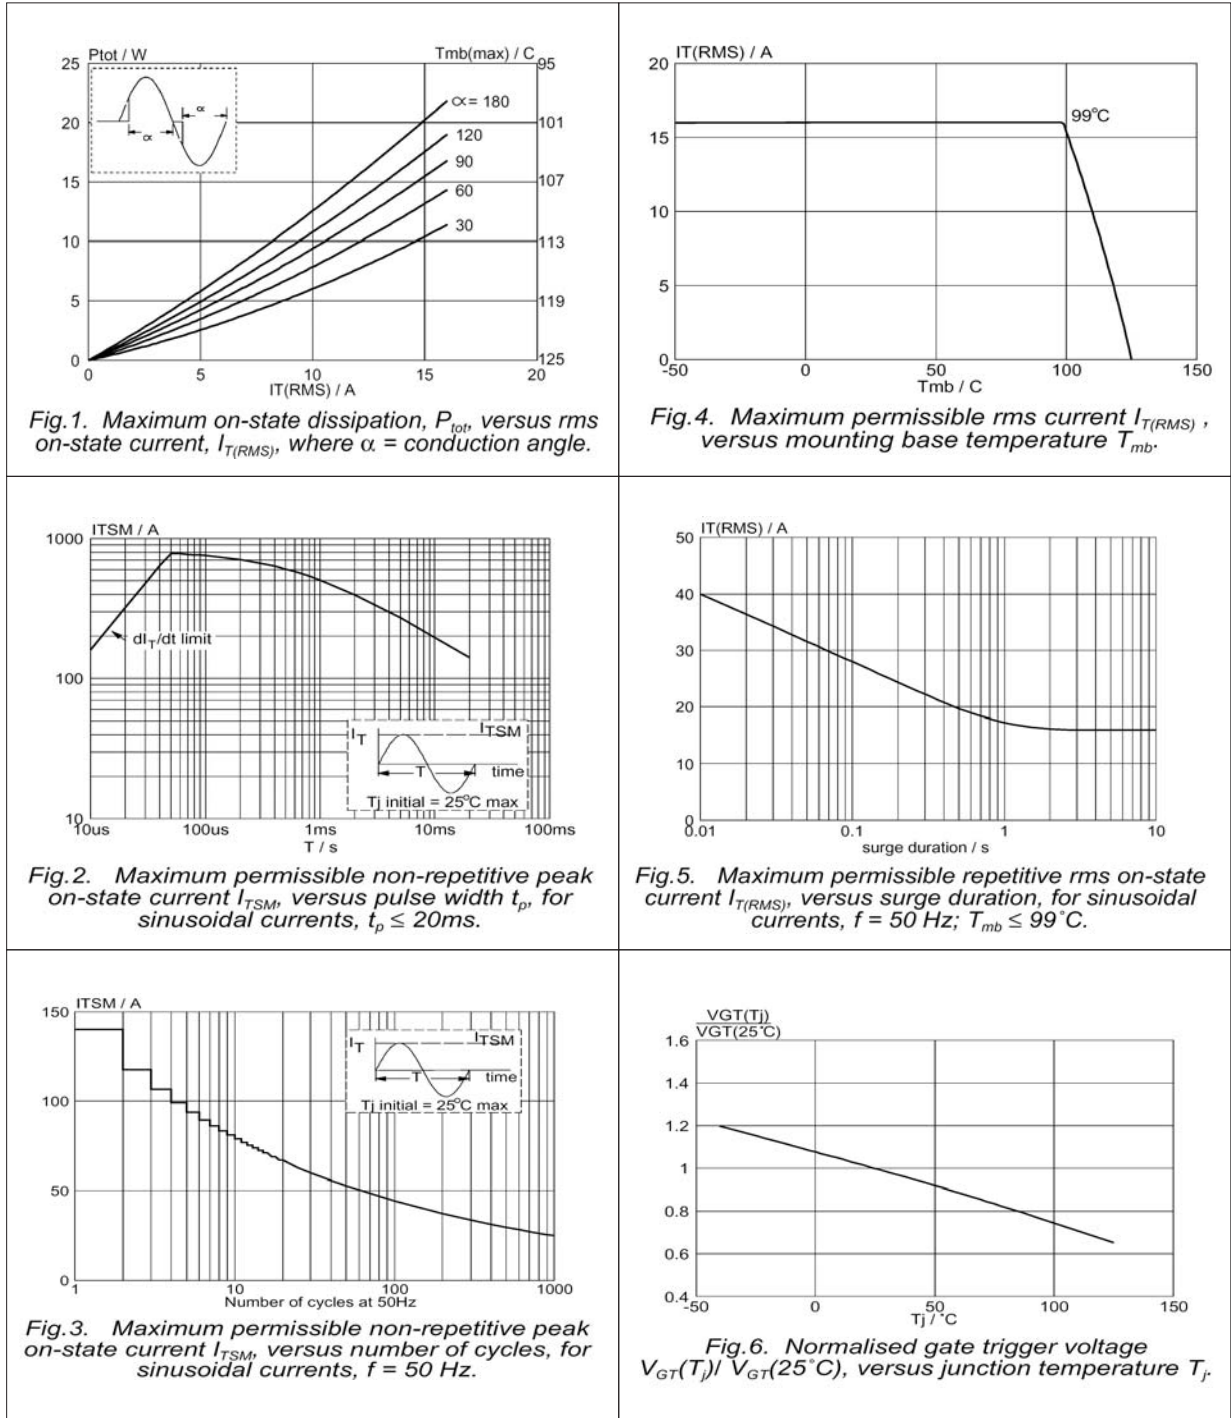

Description

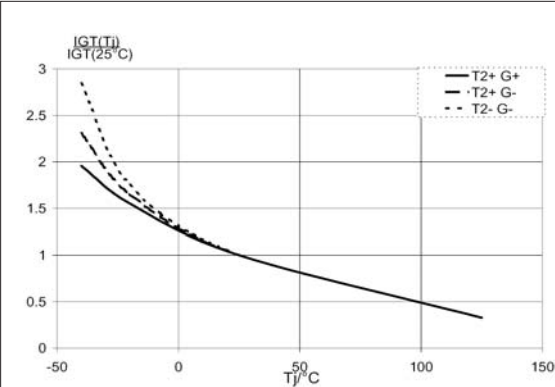


Fig. 7. Normalised gate trigger current $I_{GT}(T_J) / I_{GT}(25^\circ\text{C})$, versus junction temperature T_J .

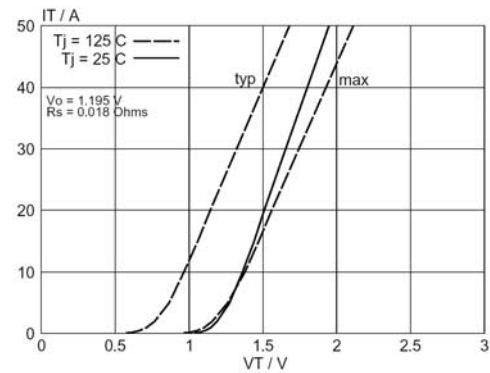


Fig. 10. Typical and maximum on-state characteristic.

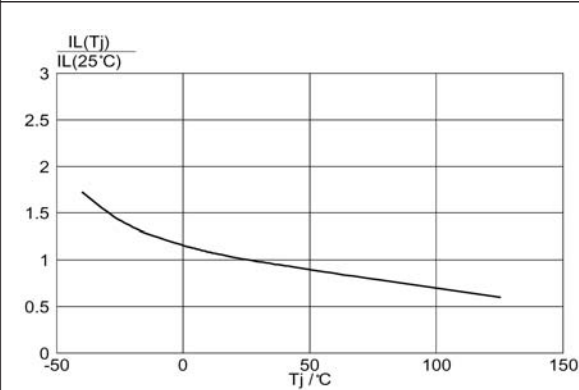


Fig. 8. Normalised latching current $I_L(T_J) / I_L(25^\circ\text{C})$, versus junction temperature T_J .

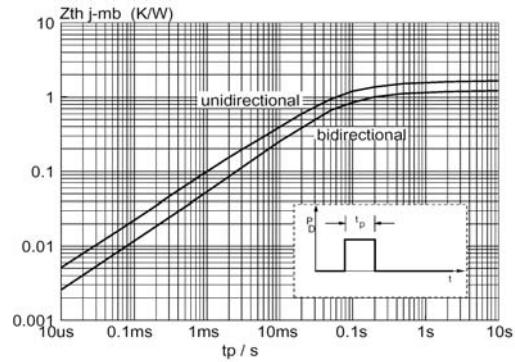


Fig. 11. Transient thermal impedance $Z_{th\ j-mb}$, versus pulse width t_p .

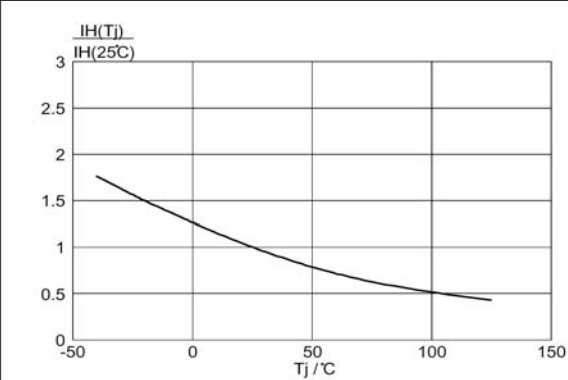


Fig. 9. Normalised holding current $I_H(T_J) / I_H(25^\circ\text{C})$, versus junction temperature T_J .


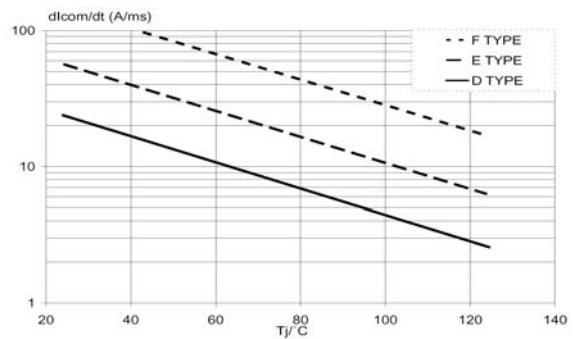


Fig. 12. Minimum, critical rate of change of commutating current di_{com}/dt versus junction temperature, $dV_{com}/dt = 10\text{V}/\mu\text{s}$.

MECHANICAL DATA

Dimensions in mm
Net Mass: 2 g

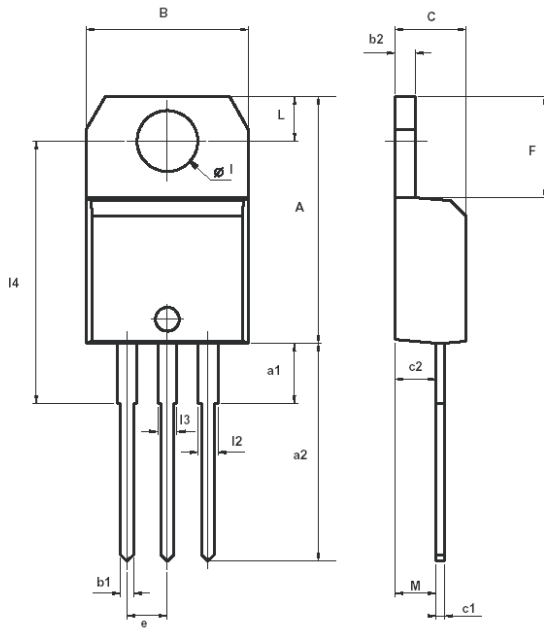

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.20		15.90	0.598		0.625
a1		3.75			0.147	
a2	13.00		14.00	0.511		0.551
B	10.00		10.40	0.393		0.409
b1	0.61		0.88	0.024		0.034
b2	1.23		1.32	0.048		0.051
C	4.40		4.60	0.173		0.181
c1	0.49		0.70	0.019		0.027
c2	2.40		2.72	0.094		0.107
e	2.40		2.70	0.094		0.106
F	6.20		6.60	0.244		0.259
l	3.75		3.85	0.147		0.151
i4	15.80	16.40	16.80	0.622	0.646	0.661
L	2.65		2.95	0.104		0.116
i2	1.14		1.70	0.044		0.066
i3	1.14		1.70	0.044		0.066
M		2.60			0.102	